




# MVE 800/3E-50A0 (EE20080050A0JA0000)

3 PH - 2 poles - 3000 RPM - 220-240/380-415 V - 50 Hz

Working moment (Kg*cm)	Unbalance (Kg*cm)	Centrifugal force (Kg)	Nominal voltage (V)	Input power (kW)	Current (A)	Power Factor	Ia/In
15,68	7,84	794	220-240/380-415	0,7	Δ 2,51 Y 1,45	0,7	4

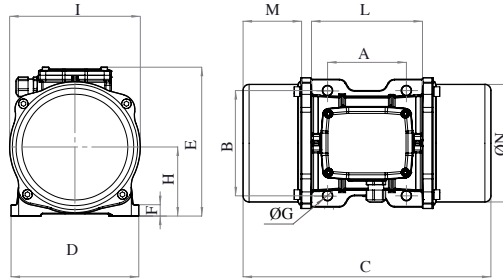

OVERALL DIMENSIONS (mm)													
Weight (Kg)	A	B	G	Holes number	C	D	E	F	H	I	L	M	N
20,3	120	170	17	4	321	208	210	22	96	185	192	62	170

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque (Nm)	Cable type	Cable gland
/	Yes	M16	17 x 30 mm	185	4G2.5 120°C	M20 120°C

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
6306 2Z		1110	2168	8881

CERTIFICATION	
<p>ATEX II2 D Ex tb IIIC T135°C Db IP66            IECEx Ex tb IIIC T135°C Db IP66            CLASS II DIV.2 GROUP F,G T4            Ex tb IIIC Tx Db IP66            CONFORM TO UL1004-3, UL1004-1, UL 60079-0, UL60079-31            CERT. CSA C22.2 No.100, CSA C22.2 No.77, CSA C22.2N.60079-0, CSA C22.2N.60079-31            T.Amb -20/+40°C</p>	    